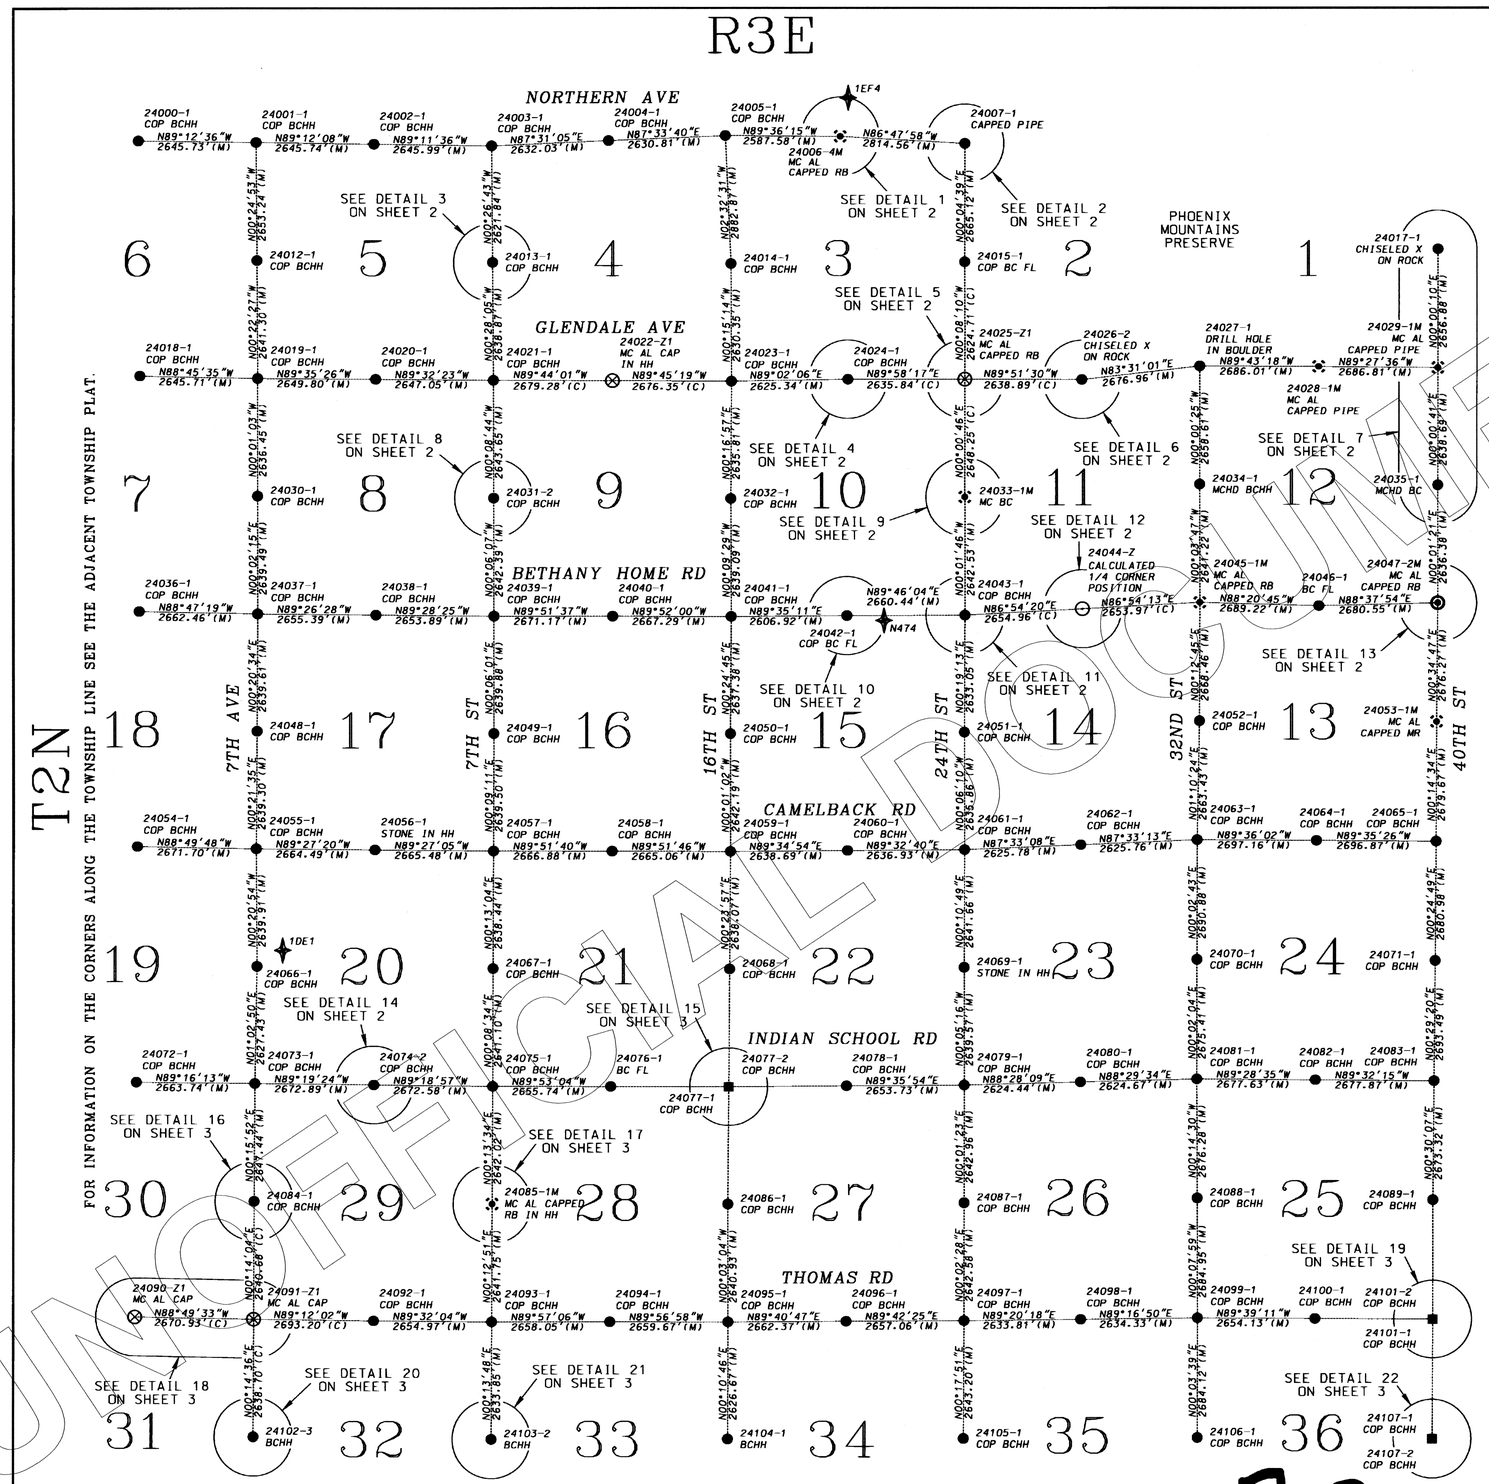

PLSS SUBDIVISION RECORD OF SURVEY

MARICOPA COUNTY GEODETIC DENSIFICATION AND CADASTRAL SURVEY

SECTIONS 1 THROUGH 36 IN TOWNSHIP 2 NORTH, RANGE 3 EAST OF THE GILA AND SALT RIVER MERIDIAN

GENERAL PURPOSE STATEMENT

THE PURPOSE OF THIS SURVEY IS TO DETERMINE AND PRESERVE UNITED STATES PUBLIC LAND SURVEY (USPLS) CORNERS. THE SECTION LINES SHOWN HEREON MAY NOT BE THE ACTUAL LEGAL BOUNDARIES OF THE SECTIONS DUE TO THE FACT THAT CONTROLLING CORNERS MAY EXIST THAT ARE NOT SHOWN OR WERE NOT SURVEYED.

SURVEYOR'S NOTES

1. AMEC Infrastructure, Inc. produced this plat for and under contract to and under the direction of Maricopa County Department of Transportation (MCDOT). The information contained hereon is deemed reliable, but prospective users of this information are advised to satisfy themselves as to the accuracy of this information prior to the use of the information shown.
2. MCDOT personnel did not perform the survey, analysis or any corner determination and therefore assumes no liability for the information contained in this instrument or attached instruments. The information is deemed reliable but is not guaranteed and should always be verified by the user.
3. The information contained on this plat conforms with the current minimum standards of an urban class survey as outlined in the Codes and Rules of the Arizona State Board of Technical Registration.
4. The positional values for the surveyed monuments were derived utilizing a weighted average of a minimum of two 90 second Real Time Kinematic GPS observations with independently gained on the fly initializations, post processing GPS, or double turned conventional total station observations by AMEC Infrastrucure Inc., relative to NGS published control points.
5. The positional values for the control points utilized for this survey were processed and adjusted by the MCDOT from static GPS field observations collected by consultants under contract by MCDOT following the "National Oceanic and Atmospheric Administration Technical Memorandum National Ocean Service National Geodetic Survey -58" Guidelines for Establishing GPS-Derived Ellipsoid Heights (Standards: 2CM and 5 CM) Version 4.3. The data was adjusted utilizing NGS A order control and adjacent Continuously Operating Reference Station sites with values published in State Plane Coordinate System, North American Datum (NAD) of 1983 (1992 EPOCH), Arizona Central Zone.
6. All bearings and distances, measured (M) and calculated (C) shown on this plat are represented in State Plane NAD 83 (1992 Epoch), Arizona Central Zone, unless specifically noted otherwise. All distances shown are horizontal and are represented in international feet and decimals of feet, unless specifically noted otherwise.
7. The elevations shown were derived using the procedures as outlined in Item 5 in conjunction with geoid 99 and a vertical adjustment. (See #8 Coordinate System Meta Data). These GPS derived elevations are not a substitute for differential leveling and the user assumes any risk associated with their use.
8. COORDINATE SYSTEM META DATA
   UNITS: International Feet (ift)
   DATUM: GRS-80
   PROJECTION: NAD 83 (Epoch 1992), Arizona Central Zone
   GEOID MODEL: Geoid 99
   HORIZONTAL ADJUSTMENT: NONE
   VERTICAL ADJUSTMENT: Origin North: 876748.214 ift
   Origin East: 816963.987 ift
   Constant Adjustment: 0.1253 ift
   Slope North: -0.1908278 ppm
   Slope East: -0.0027077 ppm
9. For additional information visit: www.mcdot.maricopa.gov
   Keyword: GDACS

SURVEYOR'S CERTIFICATION

I, SCOTT A. NELSON, HEREBY CERTIFY THAT I AM A REGISTERED LAND SURVEYOR IN THE STATE OF ARIZONA; THAT THIS MAP OR PLAT CONSISTING OF SIXTEEN (16) SHEETS REPRESENTS A SURVEY PERFORMED UNDER MY SUPERVISIOIN DURING THE MONTHS OF APRIL AND MAY 2003 AND JANUARY - AUGUST 2004; THAT THE SURVEY IS CORRECT AND ACCURATE TO THE BEST OF MY KNOWLEDGE AND BELIEF; THAT THE BOUNDARY MONUMENTS SHOWN ACTUALLY EXIST AS SHOWN AND ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED.

SCOTT A. NELSON — RLS 21782

1500 0 1500 3000 4500

Scale: 1" = 1500'

LEGEND

- NGS CONTROL STATION
- FOUND CORNER ACCEPTED
- FOUND CORNER REPLACED
- FOUND CORNER MODIFIED
- SET CORNER
- FOUND MISCELLANEOUS MONUMENT
- SET MISC. MONUMENT
- NOT FOUND, NOT SET

-*M MODIFIED / REFURBISHED
-R* REFERENCE MONUMNET
-T* TIE/ACCESSORY MONUMENT
-W* WITNESS CORNER
-Z CALCULATED POINT NOTHING SET
-Z* CALCULATED POINT SET
(C) CALCULATED
(M) MEASURED

APPROXIMATE SECTION LINE

FOR ADDITIONAL INFORMATION SEE ABBREVIATION TABLE ON SHEET 4

BOOK 708 PAGE 10
OFFICIAL RECORDS OF MARICOPA COUNTY RECORDER HELEN PURCELL
2004-1171911
10/06/2004 09:38 AM

MARICOPA COUNTY DEPARTMENT OF TRANSPORTATION CONSTRUCTION AND OPERATIONS DIVISION

SECTIONS 1 THROUGH 36 IN TOWNSHIP 2 NORTH, RANGE 3 EAST
MCDOT PROJECT 40069012

	BY	DATE
DRAWN	A. GRASS	09-22-04
CHECKED	SCOTT NELSON, R.L.S.	09-22-04
CHECKED	BRIAN DALAGER, R.L.S.	09-15-04

REGISTERED LAND SURVEYOR CERTIFICATE NO. 21782 SCOTT A. NELSON ARIZONA U.S.A.

AMEC INFRASTRUCTURE, INC.
4435 E. HOLMES
MESA, ARIZONA (480) 830-3700

COVER SHEET — SHEET 1 OF 16

708-10

UNOFFICIAL DOCUMENT

POINT NAME	LOCATION	LATITUDE	LONGITUDE	ELLIPSOID	NORTHING	EASTING	ELEVATION	GRID SCALE FACTOR	ELEVATION SCALE FACTOR	CGF	CONVERGENCE	DATE	DESCRIPTION
24000-1	T2N R3E 6 N	33ø33'10.77999"N	112ø05'28.58011"W	1099.587	928777.362	646806.791	1197.067	1.000096770	1.000052493	1.000149272	-0ø05'47"	04/16/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24001-1	T2N R3E 6 NE	33ø33'10.46206"N	112ø04'57.31809"W	1106.253	928740.883	649452.271	1203.674	1.000097084	1.000052813	1.000149902	-0ø05'30"	04/16/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24002-1	T2N R3E 5 N	33ø33'10.13841"N	112ø04'26.05609"W	1117.420	928704.048	652097.755	1214.784	1.000097382	1.000053343	1.000150733	-0ø05'13"	04/16/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24003-1	T2N R3E 5 NE	33ø33'09.80851"N	112ø03'54.79124"W	1129.112	928666.802	654743.484	1226.419	1.000097664	1.000053903	1.000151573	-0ø04'56"	05/08/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24004-1	T2N R3E 4 N	33ø33'10.97246"N	112ø03'23.71996"W	1160.674	928780.785	657373.040	1257.920	1.000097929	1.000055413	1.000153344	-0ø04'38"	04/16/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24005-1	T2N R3E 4 NE	33ø33'12.11410"N	112ø02'52.66179"W	1193.980	928892.734	660001.465	1291.171	1.000098178	1.000057003	1.000155184	-0ø04'21"	04/27/2004	FD 3" PHOENIX BC IN HH 0.35' DN NO STAMPING
24006-1		33ø33'11.96471"N	112ø02'21.67556"W	1226.021	928874.424	662623.628	1323.162	1.000098410	1.000058533	1.000156945	-0ø04'04"	05/05/2004	FD 3" PHOENIX BC FL NO STAMPING
24006-2		33ø33'11.96671"N	112ø02'21.69598"W	1226.037	928874.627	662621.900	1323.177	1.000098410	1.000058533	1.000156945	-0ø04'04"	05/05/2004	FD PK NL W/ SHINER FL
24006-3		33ø33'11.98171"N	112ø02'22.01357"W	1225.863	928876.176	662595.026	1323.005	1.000098408	1.000058523	1.000156935	-0ø04'04"	05/05/2004	FD 1/2" RB W/O ID 0.1' DN
24006-4M	T2N R3E 3 N	33ø33'11.96858"N	112ø02'22.08500"W	1225.139	928874.855	662588.980	1322.280	1.000098407	1.000058483	1.000156905	-0ø04'04"	08/24/2004	FD 1/2" RB W/ 1" PLAS CAP 0.35' DN STAMPED "HERSEY LS 11750", AFFIXED 2" MARICOPA COUNTY AL CAP 0.3' DN STAMPED "T3N R3E 1/4 S34 S3 T2N 2004 RLS 2782"
24006-T1		33ø33'11.95881"N	112ø02'20.80323"W	1226.385	928873.740	662697.447	1323.525	1.000098416	1.000058543	1.000156965	-0ø04'04"	06/10/2004	FD 1/2" RB W/O ID 0.5' DN NOTE- BENT; SHOT POINT OF ENTRY
24007-1	T2N R3E 3 NE	33ø33'10.44559"N	112ø01'48.87534"W	1463.914	928717.721	665399.148	1561.010	1.000098639	1.000069885	1.000168528	-0ø03'46"	05/05/2004	FD 1" IP 0.5' UP W/ 3" BC STAMPED "USMS 4603 E27 1 34 35 3 2"
24007-2		33ø33'11.41450"N	112ø01'47.16314"W	1503.557	928815.491	665544.149	1600.649	1.000098650	1.000071775	1.000170439	-0ø03'45"	05/05/2004	FD 2" IP FL W/ 2" CAP STAMPED "4 CB 4396"
24012-1	T2N R3E 6 E	33ø32'44.21187"N	112ø04'57.04107"W	1091.649	926087.709	649471.470	1189.126	1.000097086	1.000052113	1.000149202	-0ø05'30"	04/16/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24013-1	T2N R3E 5 E	33ø32'43.86912"N	112ø03'54.50614"W	1117.050	926045.045	654763.856	1214.413	1.000097667	1.000053323	1.000151003	-0ø04'55"	04/16/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24013-2		33ø32'44.04826"N	112ø03'54.50926"W	1117.038	926063.151	654763.617	1214.400	1.000097667	1.000053323	1.000151003	-0ø04'55"	04/16/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24014-1	T2N R3E 4 E	33ø32'43.62066"N	112ø02'51.10791"W	1159.406	926012.705	660129.326	1256.656	1.000098190	1.000055353	1.000153544	-0ø04'20"	04/08/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24015-1	T2N R3E 3 E	33ø32'44.07680"N	112ø01'48.88341"W	1328.110	926052.600	665395.546	1425.264	1.000098639	1.000063404	1.000162046	-0ø03'46"	04/08/2003	FD 3" PHOENIX BC FL NO STAMPING
24017-1	T2N R3E 1 E	33ø32'47.03936"N	111ø59'42.71861"W	1961.862	926342.137	676073.304	2058.879	1.000099354	1.000093659	1.000193017	-0ø02'36"	04/19/2004	FD CHISELED X ON ROCK NOTE- "1/4" CHISELED ON ROCK NORTH OF X
24018-1	T2N R3E 7 N	33ø32'18.60339"N	112ø05'28.03999"W	1076.384	923503.738	646843.625	1173.974	1.000096774	1.000051383	1.000148162	-0ø05'47"	04/18/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24019-1	T2N R3E 7 NE	33ø32'18.07968"N	112ø04'56.78740"W	1079.828	923446.466	649488.716	1177.362	1.000097088	1.000051553	1.000148642	-0ø05'30"	05/05/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24020-1	T2N R3E 8 N	33ø32'17.93308"N	112ø04'25.48080"W	1089.577	923427.525	652138.445	1187.055	1.000097387	1.000052013	1.000149412	-0ø05'12"	04/24/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24021-1	T2N R3E 8 NE	33ø32'17.76125"N	112ø03'54.20682"W	1101.065	923406.260	654785.411	1198.487	1.000097669	1.000052563	1.000150243	-0ø04'55"	05/05/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24022-Z1	T2N R3E 9 N	33ø32'17.67486"N	112ø03'22.55160"W	1115.670	923393.808	657464.660	1213.035	1.000097938	1.000053263	1.000151203	-0ø04'38"	09/08/2004	FD HH (NO MONUMENT IN HH); EPOXIED 2" MARICOPA COUNTY AL CAP IN HH 0.6' DN STAMPED "T2N R3E S4 S9 2004 RLS 21782"
24023-1	T2N R3E 9 NE	33ø32'17.59627"N	112ø02'50.93092"W	1134.420	923382.376	660140.986	1231.732	1.000098191	1.000054153	1.000152353	-0ø04'20"	04/09/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24024-1	T2N R3E 10 N	33ø32'18.06538"N	112ø02'19.91787"W	1182.738	923426.587	662765.950	1280.002	1.000098422	1.000056463	1.000154894	-0ø04'03"	04/08/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24024-2		33ø32'18.06612"N	112ø02'19.38674"W	1183.544	923426.608	662810.905	1280.807	1.000098426	1.000056503	1.000154934	-0ø04'03"	04/08/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24025-1		33ø32'18.11157"N	112ø01'48.77927"W	1266.182	923428.259	665401.485	1363.401	1.000098639	1.000060444	1.000159095	-0ø03'46"	04/28/2003	FD 1/2" RB W/ 1" PLAS CAP 0.5' UP STAMPED "LS 21081"
24025-2		33ø32'18.10732"N	112ø01'48.76512"W	1265.527	923427.829	665402.683	1362.747	1.000098639	1.000060414	1.000159065	-0ø03'46"	04/28/2003	FD 3/4" ROUND IRON METAL ROD 0.4' UP W/O ID NOTE- BAR BENT TO WEST, SHOT POINT OF ENTRY
24025-Z1	T2N R3E 10 NE	33ø32'18.10800"N	112ø01'48.77571"W	1265.519	923427.898	665401.786	1362.738	1.000098639	1.000060414	1.000159055	-0ø03'46"	09/08/2004	SET 5/8" RB W/ 2" MARICOPA COUNTY AL CAP 0.3' UP STAMPED "T2N R3E S3 S2 S10 S11 2004 RLS 21782"
24026-1		33ø32'18.43604"N	112ø01'17.65438"W	1540.961	923458.279	668035.887	1638.139	1.000098840	1.000073565	1.000172410	-0ø03'29"	04/28/2004	FD 3" MCFCD BC FL STAMPED "RLS 14959"
24026-2	T2N R3E 11 N	33ø32'18.07092"N	112ø01'17.59746"W	1571.442	923421.371	668040.668	1668.621	1.000098840	1.000075016	1.000173870	-0ø03'29"	08/24/2004	FD CHISELED X ON ROCK NOTE- "1/4" CHISELED ON ROCK TO NORTH OF X
24027-1	T2N R3E 11 NE	33ø32'21.08696"N	112ø00'46.17493"W	1877.969	923723.627	670700.512	1975.105	1.000099027	1.000089658	1.000188686	-0ø03'11"	05/04/2004	FD DRILL HOLE IN BOULDER 1.5' UP NOTE- "T2NR3E" CHISELED ON BOULDER TO WEST OF DRILL HOLE, ALSO CHISELED 1 NOTCH TO NORTH, 1 NOTCH TO EAST, 5 NOTCHES TO SOUTH AND 5 NOT
24028-1M	T2N R3E 12 N	33ø32'20.98134"N	112ø00'14.43986"W	1484.777	923710.576	673386.491	1581.883	1.000099199	1.000070885	1.000170089	-0ø02'54"	08/26/2004	FD 1" IP 0.1' UP W/TAG STAMPED "LS 21080", AFFIXED 2" MARICOPA COUNTY AL CAP 0.2' UP STAMPED "T2N R3E 1/4 S1 S12 2004 RLS 21782"
24029-1M	T2N R3E 12 NE	33ø32'20.75206"N	111ø59'42.69631"W	1488.736	923685.254	676073.179	1585.817	1.000099354	1.000071075	1.000170429	-0ø02'36"	08/26/2004	FD 1" IP 0.1' UP W/TAG STAMPED "LS 21080", AFFIXED 2" MARICOPA COUNTY AL CAP 0.2' UP STAMPED "T2N S1 S12 R3E T2N R4E S6 2004 RLS 21782"
24030-1	T2N R3E 7 E	33ø31'51.99459"N	112ø04'56.72814"W	1066.671	920810.015	649489.518	1164.265	1.000097088	1.000050923	1.000148012	-0ø05'30"	04/18/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24031-1		33ø31'51.50344"N	112ø03'54.08364"W	1082.967	920752.345	654792.041	1180.452	1.000097669	1.000051703	1.000149372	-0ø04'55"	04/24/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24031-2	T2N R3E 8 E	33ø31'51.60509"N	112ø03'54.08286"W	1083.111	920762.619	654792.121	1180.596	1.000097669	1.000051703	1.000149382	-0ø04'55"	04/24/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24032-1	T2N R3E 9 E	33ø31'51.51765"N	112ø02'51.04511"W	1107.168	920746.599	660127.996	1204.546	1.000098189	1.000052853	1.000151053	-0ø04'20"	04/16/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24033-1M	T2N R3E 10 E	33ø31'51.90611"N	112ø01'48.74851"W	1197.439	920779.649	665401.189	1294.725	1.000098639	1.000057163	1.000155814	-0ø03'46"	08/30/2004	FD STONE 4.0' DN UNDER SIDEWALK, REFERENCED ONTO SIDEWALK AND EPOXIED 3" MARICOPA COUNTY BC FL STAMPED "T2N R3E 1/4 S10 S11 2004 RLS 21782"
24033-2		33ø31'51.91427"N	112ø01'48.74877"W	1197.417	920780.474	665401.168	1294.704	1.000098639	1.000057163	1.000155804	-0ø03'46"	06/30/2004	FD 1/2" RB 1.5' DN W/O ID UNDER SIDEWALK
24033-T1		33ø31'51.93435"N	112ø01'48.58629"W	1197.177	920782.488	665414.924	1294.464	1.000098640	1.000057153	1.000155794	-0ø03'46"	06/30/2004	FD PK NL FL
24033-T2		33ø31'51.86564"N	112ø01'48.54244"W	1196.891	920775.540	665418.627	1294.177	1.000098641	1.000057143	1.000155784	-0ø03'46"	06/11/2004	FD PK NL FL
24034-1	T2N R3E 11 E	33ø31'54.78253"N	112ø00'46.14206"W	1290.142	921065.014	670700.828	1387.346	1.000099027	1.000061594	1.000160626	-0ø03'11"	04/30/2003	FD 3" MCHD BC IN HH 0.5' DN STAMPED "1385.31"
24035-1	T2N R3E 12 E	33ø31'54.64469"N	111ø59'42.67892"W	1306.307	921046.560	676072.653	1403.453	1.000099354	1.000062364	1.000161726	-0ø02'36"	04/30/2004	FD 3" MCHD BC 0.4' DN STAMPED "1401.5"
24036-1	T2N R3E 18 N	33ø31'26.39301"N	112ø05'28.14425"W	1054.002	918226.804	646825.924	1151.712	1.000096772	1.000050313	1.000147092	-0ø05'47"	05/08/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24037-1	T2N R3E 18 NE	33ø31'25.87933"N	112ø04'56.69871"W	1054.861	918170.521	649487.792	1152.518	1.000097088	1.000050363	1.000147452	-0ø05'30"	05/05/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24038 -1	T2N R3E 17 N	33ø31'25.66391"N	112ø04'25.33185"W	1060.254	918144.617	652143.053	1157.858	1.000097387	1.000050613	1.000148012	-0ø05'12"	04/24/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24039-1	T2N R3E 17 NE	33ø31'25.46133"N	112ø03'53.98263"W	1066.488	918120.237	654796.827	1164.039	1.000097670	1.000050913	1.000148592	-0ø04'55"	04/18/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24040-1	T2N R3E 16 N	33ø31'25.43359"N	112ø03'22.42828"W	1075.621	918113.726	657467.993	1173.119	1.000097938	1.000051353	1.000149292	-0ø04'37"	04/18/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24041-1	T2N R3E 16 NE	33ø31'25.40658"N	112ø02'50.91979"W	1084.175	918107.521	660135.276	1181.623	1.000098190	1.000051763	1.000149952	-0ø04'20"	04/28/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24042-1	T2N R3E 15 N	33ø31'25.62428"N	112ø02'20.12556"W	1104.068	918126.344	662742.124	1201.470	1.000098420	1.000052703	1.000151133	-0ø04'03"	04/16/2003	FD 3" PHOENIX BC FL NO STAMPING
24042-2		33ø31'25.62331"N	112ø02'20.10768"W	1103.985	918126.244	662743.638	1201.387	1.000098420	1.000052703	1.000151133	-0ø04'03"	04/30/2004	FD PK NL FL
24043-1	T2N R3E 15 NE	33ø31'25.76084"N	112ø01'48.69837"W	1142.746	918137.123	665402.541	1240.105	1.000098639	1.000054553	1.000153203	-0ø03'46"	04/29/2003	FD 3" PHOENIX BC IN HH 1' DN NO STAMPING
24043-T1		33ø31'25.59017"N	112ø01'49.36813"W	1141.739	918119.936	665345.826	1239.100	1.000098635	1.000054503	1.000153143	-0ø03'46"	04/28/2003	SET PK NL FL
24043-T2		33ø31'25.74344"N	112ø01'52.71305"W	1137.195	918135.739	665062.685	1234.559	1.000098612	1.000054293	1.000152903	-0ø03'48"	04/28/2003	FD 3" PHOENIX BC FL NO STAMPING
24044-W1	T2N R3E 14 N WC	33ø31'27.14123"N	112ø01'18.79810"W	1162.088	918273.972	667933.826	1259.407	1.000098832	1.000055473	1.000154314	-0ø03'29"	05/03/2004	FD 3" MCFCD BC 0.75' DN STAMPING ILLEGIBLE
24044-Z	T2N R3E 14 N	33ø31'27.20652"N	112ø01'17.38288"W	N/A	918280.449	668053.634	N/A	1.000098841	1.000054553	1.000153404	-0ø03'28"	N/A	CALCULATED POSITION - NOTHING FD OR SET
24045-1M	T2N R3E 14 NE	33ø31'28.65024"N	112ø00'46.07886"W	1207.296	918423.800	670703.731	1304.575	1.000099027	1.000057633	1.000156665	-0ø03'11"	08/24/2004	FD 1/2" RB W/ 1" PLAS CAP 1' DN STAMPED "SPENCER RLS 34399", AFFIXED 2" MARICOPA COUNTY AL CAP 1.2' DN STAMPED "T2N R3E S11 S12 S14 S13 2004 RLS 21782"
24046-1	T2N R3E 13 N	33ø31'27.90573"N	112ø00'14.32342"W	1211.626	918346.176	673391.830	1308.874	1.000099199	1.000057843	1.000157045	-0ø02'54"	04/16/2003	FD 3" BC FL NO STAMPING
24047-1		33ø31'26.14140"N	111ø59'42.69500"W	1199.490	918165.714	676069.111	1296.712	1.000099354	1.000057263	1.000156625	-0ø02'36"	04/12/2003	FD 3" MCHD BC FL NO STAMPING
24047-2M	T2N R3E 13 NE	33ø31'28.56023"N	111ø59'42.66758"W	1209.199	918410.184	676071.617	1306.415	1.000099354	1.000057723	1.000157085	-0ø02'36"	08/26/2004	FD CPS FL, REPLACED W/ 5/8" RB W/ 2" MARICOPA COUNTY AL CAP STAMPED "T2N S12 S13 R3E R4E S7 2004 RLS 21782"
24048-1	T2N R3E 18 E	33ø30'59.76311"N	112ø04'56.83546"W	1043.086	915530.954	649471.997	1140.804	1.000097086	1.000049792	1.000146892	-0ø05'30"	04/27/2004	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24049-1	T2N R3E 17 E	33ø30'59.34221"N	112ø03'53.99260"W	1052.718	915480.361	654792.209	1150.333	1.000097669	1.000050253	1.000147932	-0ø04'55"	05/08/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24050-1	T2N R3E 16 E	33ø30'59.31263"N	112ø02'51.10475"W	1064.715	915470.209	660116.292	1162.230	1.000098188	1.000050833	1.000149022	-0ø04'20"	04/18/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24051-1	T2N R3E 15 E	33ø30'59.70954"N	112ø01'48.83825"W	1097.578	915504.116	665387.818	1195.006	1.000098638	1.000052403	1.000151043	-0ø03'46"	05/05/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24052-1	T2N R3E 14 E	33ø31'02.24838"N	112ø00'46.16662"W	1143.719	915755.356	670693.828	1241.069	1.000099026	1.000054603	1.000153634	-0ø03'11"	04/16/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24053-1M	T2N R3E 13 E	33ø31'02.08219"N	111ø59'42.96353"W	1167.546	915734.053	676044.537	1264.829	1.000099353	1.000055733	1.000155094	-0ø02'36"	08/24/2004	FD 3/4" ROUND STL METAL ROD 0.5' DN W/O ID, AFFIXED 2" MARICOPA COUNTY AL CAP 0.3' DN STAMPED "T2N 1/4 R3E R4E S13 S18 2004 RLS 21782"
24054-1	T2N R3E 19 N	33ø30'34.14637"N	112ø05'28.53113"W	1035.620	912946.257	646784.288	1133.449	1.000096767	1.000049442	1.000146211	-0ø05'47"	04/18/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24055-1	T2N R3E 19 NE	33ø30'33.64998"N	112ø04'56.98135"W	1033.853	912891.705	649455.429	1131.632	1.000097084	1.000049352	1.000146441	-0ø05'30"	04/22/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24056-1	T2N R3E 20 N	33ø30'33.44047"N	112ø04'25.51218"W	1032.979	912866.385	652119.797	1130.706	1.000097385	1.000049312	1.000146702	-0ø05'12"	04/22/2003	FD STONE IN HH 3' DN
24057-1	T2N R3E 20 NE	33ø30'33.22681"N	112ø03'54.03137"W	1038.973	912840.869	654785.153	1136.651	1.000097669	1.000049602	1.000147272	-0ø04'55"	05/07/2004	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24058-1	T2N R3E 21 N	33ø30'33.19948"N	112ø03'22.53300"W	1043.555	912834.406	657452.026	1141.183	1.000097937	1.000049822	1.000147762	-0ø04'37"	04/23/2003	FD 3" PHOENIX BC IN HH 0.8' DN NO STAMPING
24059-1	T2N R3E 21 NE	33ø30'33.17068"N	112ø02'51.05608"W	1049.023	912828.024	660117.081	1146.604	1.000098188	1.000050083	1.000148272	-0ø04'20"	05/05/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24060-1	T2N R3E 22 N	33ø30'33.39311"N	112ø02'19.89179"W	1059.897	912847.288	662755.696	1157.434	1.000098421	1.000050603	1.000149022	-0ø04'03"	05/05/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24061-1	T2N R3E 22 NE	33ø30'33.63023"N	112ø01'48.74839"W	1074.980	912868.260	665392.542	1172.475	1.000098638	1.000051323	1.000149962	-0ø03'46"	05/08/2003	FD 3" PHOENIX BC IN HH 0.45' DN NO STAMPING
24062-1	T2N R3E 23 N	33ø30'34.76708"N	112ø01'17.76502"W	1093.500	912980.400	668015.925	1190.956	1.000098838	1.000052203	1.000151043	-0ø03'29"	05/08/2003	FD 2 1/2" PHOENIX BC IN HH 0.5' DN NO STAMPING
24063-1	T2N R3E 23 NE	33ø30'35.90119"N	112ø00'46.78167"W	1114.881	913092.481	670639.287	1212.298	1.000099023	1.000053223	1.000152253	-0ø03'11"	05/05/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24064-1	T2N R3E 24 N	33ø30'35.73878"N	112ø00'14.92589"W	1134.339	913073.678	673336.384	1231.721	1.000099196	1.000054153	1.000153354	-0ø02'54"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24065-1	T2N R3E 24 NE	33ø30'35.56949"N	111ø59'43.07360"W	1152.383	913054.410	676033.188	1249.730	1.000099352	1.000055013	1.000154374	-0ø02'36"	05/06/2004	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24066-1	T2N R3E 19 E	33ø30'07.53129"N	112ø04'56.74207"W	1023.759	910251.846	649471.473	1121.598	1.000097086	1.000048872	1.000145961	-0ø05'29"	05/06/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24067-1	T2N R3E 20 E	33ø30'07.12199"N	112ø03'54.10529"W	1028.208	910202.452	654775.124	1125.949	1.000097668	1.000049082	1.000146762	-0ø04'55"	04/22/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24068-1	T2N R3E 21 E	33ø30'07.06985"N	112ø02'51.23385"W	1039.939	910190.022	660098.703	1137.587	1.000098187	1.000049642	1.000147842	-0ø04'20"	04/28/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24069-1	T2N R3E 22 E	33ø30'07.49346"N	112ø01'48.81245"W	1067.113	910226.612	665384.228	1164.676	1.000098638	1.000050943	1.000149582	-0ø03'46"	04/18/2003	FD STONE IN HH 0.6' DN
24070-1	T2N R3E 23 E	33ø30'09.27740"N	112ø00'46.77733"W	1099.773	910401.605	670637.157	1197.256	1.000099023	1.000052503	1.000151533	-0ø03'11"	04/23/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24071-1	T2N R3E 24 E	33ø30'09.04418"N	111ø59'43.27823"W	1132.249	910373.501	676013.830	1229.657	1.000099351	1.000054053	1.000153414	-0ø02'36"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24072-1	T2N R3E 30 N	33ø29'41.83129"N	112ø05'28.71380"W	1017.494	907658.777	646759.926	1115.435	1.000096764	1.000048572	1.000145341	-0ø05'47"	04/22/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24073-1	T2N R3E 30 NE	33ø29'41.53884"N	112ø04'57.25965"W	1015.227	907624.850	649423.448	1113.116	1.000097081	1.000048462	1.000145551	-0ø05'30"	04/21/2003	FD 3" PHOENIX BC IN HH 0.35' DN NO STAMPING
24074-1		33ø29'41.26976"N	112ø04'25.70107"W	1015.613	907593.496	652095.822	1113.452	1.000097382	1.000048482	1.000145871	-0ø05'12"	05/08/2003	FD CONC IN HH 0.6' DN
24074-2	T2N R3E 29 N	33ø29'41.26761"N	112ø04'25.69718"W	1015.477	907593.279	652096.151	1113.315	1.000097382	1.000048482	1.000145861	-0ø05'12"	05/06/2004	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24075-1	T2N R3E 29 NE	33ø29'40.99074"N	112ø03'54.13841"W	1017.127	907561.364	654768.545	1114.916	1.000097667	1.000048552	1.000146231	-0ø04'55"	05/08/2003	FD 2 1/2" PHOENIX BC IN HH 0.7' DN NO STAMPING
24076-1	T2N R3E 28 N	33ø29'40.97421"N	112ø03'22.77684"W	1024.486	907556.009	657424.279	1122.228	1.000097934	1.000048912	1.000146852	-0ø04'37"	05/08/2003	FD 1 1/4" BC FL STAMPED "RLS 27239"
24077-1		33ø29'40.94882"N	112ø02'51.41847"W	1033.251	907549.982	660079.740	1130.948	1.000098185	1.000049322	1.000147512	-0ø04'20"	05/08/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24077-2		33ø29'40.94888"N	112ø02'51.38927"W	1033.249	907549.985	660082.213	1130.946	1.000098185	1.000049322	1.000147522	-0ø04'20"	05/08/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24078-1	T2N R3E 27 N	33ø29'41.16352"N	112ø02'20.06740"W	1047.289	907568.445	662734.612	1144.943	1.000098420	1.000049992	1.000148422	-0ø04'03"	05/01/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24079-1	T2N R3E 27 NE	33ø29'41.37740"N	112ø01'48.73056"W	1058.857	907587.048	665388.275	1156.469	1.000098638	1.000050553	1.000149192	-0ø03'46"	04/29/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24080-1	T2N R3E 26 N	33ø29'42.09841"N	112ø01'17.75041"W	1074.522	907657.161	668011.781	1172.095	1.000098838	1.000051293	1.000150143	-0ø03'28"	05/01/2003	FD 3" PHOENIX BC IN HH 0.8' DN NO STAMPING
24081-1	T2N R3E 26 NE	33ø29'42.80665"N	112ø00'46.76702"W	1088.716	907726.200	670635.547	1186.249	1.000099023	1.000051973	1.000151003	-0ø03'11"	05/01/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24082-1	T2N R3E 25 N	33ø29'42.58800"N	112ø00'15.14776"W	1102.266	907701.730	673313.069	1199.761	1.000099194	1.000052623	1.000151823	-0ø02'54"	04/23/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24083-1	T2N R3E 25 NE	33ø29'42.39534"N	111ø59'43.52553"W	1113.528	907680.113	675990.847	1210.984	1.000099350	1.000053163	1.000152513	-0ø02'36"	05/01/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24084-1	T2N R3E 30 E	33ø29'15.34495"N	112ø04'57.35393"W	1006.583	904977.441	649411.234	1104.517	1.000097079	1.000048052	1.000145141	-0ø05'30"	06/10/2004	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24084-T1		33ø29'15.90007"N	112ø05'28.83203"W	1005.475	905037.919	646745.505	1103.463	1.000096762	1.000048002	1.000144771	-0ø05'47"	05/05/2004	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING

SECTIONS 1 through 36 IN
TOWNSHIP 2 NORTH, RANGE 3 EAST
MCDOT PROJECT 40069012

24084-T2		33ø29'15.66031"N	112ø04'59.55412"W	1006.859	905009.612	649224.955	1104.795	1.000097058	1.000048062	1.000145131	-0ø05'31"	05/04/2004	FD 3" PHOENIX BC IN HH 0.35' DN NO STAMPING
24084-T3		33ø29'15.08724"N	112ø04'25.66468"W	1006.268	904947.219	652094.900	1104.149	1.000097382	1.000048042	1.000145421	-0ø05'12"	05/06/2004	FD 2 1/2" BC IN HH 1.5' DN NO STAMPING
24085-1M	T2N R3E 29 E	33ø29'14.85038"N	112ø03'54.21690"W	1010.251	904919.362	654758.122	1108.081	1.000097666	1.000048232	1.000145901	-0ø04'55"	08/31/2004	FD 3/4" RB W/O ID IN HH 0.4' DN, AFFIXED 2" MARICOPA COUNTY AL CAP 0.3' DN STAMPED "T2N R3E 1/4 S29 S28 2004 RLS 21782"
24085-2		33ø29'14.75134"N	112ø03'54.21545"W	1009.980	904909.352	654758.231	1107.810	1.000097666	1.000048212	1.000145891	-0ø04'55"	04/23/2003	FD 2" PHOENIX BC IN HH 0.6' DN NO STAMPING
24086-1	T2N R3E 28 E	33ø29'14.86762"N	112ø02'51.56955"W	1025.558	904913.968	660063.621	1123.292	1.000098183	1.000048962	1.000147152	-0ø04'20"	05/08/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24087-1	T2N R3E 27 E	33ø29'15.22762"N	112ø01'48.70895"W	1049.668	904944.085	665387.215	1147.317	1.000098638	1.000050113	1.000148752	-0ø03'46"	04/29/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24088-1	T2N R3E 26 E	33ø29'16.32756"N	112ø00'46.60437"W	1075.374	905049.943	670646.839	1172.945	1.000099023	1.000051343	1.000150363	-0ø03'11"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24089-1	T2N R3E 25 E	33ø29'15.94604"N	111ø59'43.77808"W	1097.024	905006.896	675967.431	1194.519	1.000099349	1.000052373	1.000151723	-0ø02'37"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24090-1		33ø28'49.69234"N	112ø05'28.61043"W	997.832	902389.069	646759.818	1095.854	1.000096764	1.000047632	1.000144401	-0ø05'47"	05/05/2004	FD PK NL FL
24090-T1		33ø28'50.28263"N	112ø05'28.55601"W	998.163	902448.722	646764.527	1096.184	1.000096764	1.000047652	1.000144421	-0ø05'47"	06/14/2004	FD 1/2" BOLT FL W/ WASHER STAMPED "12317 FISH"
24090-T10		33ø28'49.59061"N	112ø05'21.08132"W	998.191	902377.721	647397.480	1096.199	1.000096841	1.000047652	1.000144501	-0ø05'43"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 13TH AVE AND THOMAS RD
24090-T11		33ø28'49.46732"N	112ø05'13.20016"W	998.246	902364.159	648064.955	1096.240	1.000096921	1.000047652	1.000144581	-0ø05'38"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 11TH AVE NORTH AND THOMAS RD
24090-T12		33ø28'49.43774"N	112ø05'11.30241"W	998.360	902360.906	648225.681	1096.351	1.000096940	1.000047662	1.000144611	-0ø05'37"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 11TH AVE SOUTH AND THOMAS RD
24090-T13		33ø28'49.31014"N	112ø05'03.31390"W	998.508	902346.910	648902.248	1096.485	1.000097020	1.000047672	1.000144691	-0ø05'33"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 8TH AVE NORTH AND THOMAS RD
24090-T14		33ø28'49.30256"N	112ø05'02.78802"W	998.557	902346.073	648946.787	1096.532	1.000097025	1.000047672	1.000144701	-0ø05'33"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 8TH AVE SOUTH AND THOMAS RD
24090-T2		33ø28'56.18838"N	112ø05'28.92827"W	999.219	903045.669	646734.003	1097.234	1.000096761	1.000047702	1.000144471	-0ø05'47"	06/14/2004	FD 3" BC IN HH 0.7' DN NO STAMPING NOTE- CL OF 15TH AVE AND CATALINA DR
24090-T3		33ø29'02.66064"N	112ø05'28.89444"W	1000.291	903699.817	646737.968	1098.298	1.000096761	1.000047752	1.000144521	-0ø05'47"	06/14/2004	FD 3" BC IN HH 1' DN NO STAMPING NOTE- CL OF 15TH AVE AND EARLL DR
24090-T4		33ø28'49.84175"N	112ø05'36.85200"W	998.189	902405.351	646061.823	1096.227	1.000096678	1.000047652	1.000144341	-0ø05'51"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 16TH AVE NORTH AND THOMAS RD
24090-T5		33ø28'49.85194"N	112ø05'37.51903"W	998.154	902406.478	646005.331	1096.193	1.000096671	1.000047652	1.000144331	-0ø05'52"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 16TH AVE SOUTH AND THOMAS RD
24090-T6		33ø28'49.96727"N	112ø05'44.74237"W	998.511	902419.183	645393.569	1096.563	1.000096595	1.000047672	1.000144271	-0ø05'56"	06/14/2004	FD 3" SCOTTSDALE BC FL NO STAMPING NOTE- CL OF 17TH AVE AND THOMAS RD
24090-T7		33ø28'46.35729"N	112ø05'28.96861"W	996.199	902052.046	646728.915	1094.225	1.000096760	1.000047562	1.000144321	-0ø05'47"	06/14/2004	FD 2" BC IN HH 0.7' DN NO STAMPING NOTE- CL OF 15TH AVE AND EDGEMONT AVE
24090-T8		33ø28'43.02647"N	112ø05'28.97567"W	995.244	901715.402	646727.750	1093.274	1.000096760	1.000047512	1.000144281	-0ø05'47"	06/14/2004	FD 2" BC IN HH 0.7' DN NO STAMPING NOTE- CL OF 15TH AVE AND WINDSOR AVE
24090-T9		33ø28'49.58930"N	112ø05'20.98746"W	998.142	902377.576	647405.429	1096.150	1.000096842	1.000047652	1.000144501	-0ø05'43"	06/14/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 13TH AVE AND THOMAS RD
24090-Z1	T2N R3E 31 N	33ø28'49.71600"N	112ø05'28.96179"W	998.068	902391.511	646730.064	1096.091	1.000096760	1.000047652	1.000144411	-0ø05'47"	08/31/2004	SET 2" MARICOPA COUNTY AL CAP FL IN CONC STAMPED "T2N R3E S30 1/4 S31 2004 RLS 21782"
24091-1		33ø28'49.23907"N	112ø04'58.86857"W	998.952	902339.123	649278.735	1096.921	1.000097064	1.000047692	1.000144761	-0ø05'30"	05/06/2004	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24091-T1		33ø28'49.13513"N	112ø04'49.48356"W	998.407	902327.354	650073.584	1096.359	1.000097155	1.000047662	1.000144821	-0ø05'25"	06/10/2004	FD 3" BC IN HH 1' DN NO STAMPING NOTE- CL OF 3TH AVE AND THOMAS RD
24091-T2		33ø28'49.05421"N	112ø04'41.59696"W	999.095	902318.130	650741.529	1097.034	1.000097231	1.000047692	1.000144931	-0ø05'21"	06/10/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 3RD AVE AND THOMAS RD
24091-T3		33ø28'49.05327"N	112ø04'41.53384"W	999.079	902318.026	650746.876	1097.017	1.000097232	1.000047692	1.000144931	-0ø05'21"	06/10/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 3RD AVE AND THOMAS RD
24091-T4		33ø28'49.01086"N	112ø04'41.51932"W	999.038	902313.738	650748.098	1096.976	1.000097232	1.000047692	1.000144931	-0ø05'21"	06/10/2004	FD 3" PHOENIX BC FL NO STAMPING NOTE- CL OF 3RD AVE AND THOMAS RD
24091-Z1	T2N R3E 31 NE	33ø28'49.21784"N	112ø04'57.43162"W	999.264	902336.782	649400.435	1097.230	1.000097078	1.000047702	1.000144791	-0ø05'30"	08/30/2004	SET 2" MARICOPA COUNTY AL CAP FL IN CONC STAMPED "T2N R3E S30 S29 S31 S32 2004 RLS 21782"
24092-1	T2N R3E 32 N	33ø28'48.88749"N	112ø04'25.63544"W	1000.648	902299.205	652093.370	1098.560	1.000097382	1.000047772	1.000145161	-0ø05'12"	05/09/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24093-1	T2N R3E 32 NE	33ø28'48.71267"N	112ø03'54.28887"W	1003.376	902277.631	654748.252	1101.236	1.000097665	1.000047902	1.000145571	-0ø04'55"	05/01/2003	FD 3" PHOENIX BC IN HH 0.2' DN NO STAMPING
24094-1	T2N R3E 33 N	33ø28'48.72694"N	112ø03'22.90526"W	1008.909	902275.387	657406.300	1106.718	1.000097932	1.000048162	1.000146101	-0ø04'37"	05/09/2003	FD 3" PHOENIX BC IN HH 0.3' DN NO STAMPING
24095-1	T2N R3E 33 NE	33ø28'48.73796"N	112ø02'51.50245"W	1018.551	902273.035	660065.973	1116.313	1.000098184	1.000048622	1.000146812	-0ø04'20"	04/29/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24096-1	T2N R3E 34 N	33ø28'48.91737"N	112ø02'20.06854"W	1028.102	902287.922	662728.299	1125.821	1.000098419	1.000049082	1.000147502	-0ø04'03"	04/29/2003	FD 3" PHOENIX BC IN HH 0.25' DN NO STAMPING
24097-1	T2N R3E 34 NE	33ø28'49.08163"N	112ø01'48.69719"W	1039.629	902301.508	665385.322	1137.306	1.000098638	1.000049632	1.000148272	-0ø03'45"	04/29/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24098-1	T2N R3E 35 N	33ø28'49.40994"N	112ø01'17.60213"W	1051.530	902331.921	668018.959	1149.169	1.000098839	1.000050203	1.000149042	-0ø03'28"	04/23/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24099-1	T2N R3E 35 NE	33ø28'49.76244"N	112ø00'46.50131"W	1064.546	902364.998	670653.079	1162.146	1.000099024	1.000050823	1.000149852	-0ø03'11"	05/07/2004	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24100-1	T2N R3E 36 N	33ø28'49.62670"N	112ø00'15.16424"W	1073.609	902348.930	673307.161	1171.170	1.000099194	1.000051253	1.000150453	-0ø02'54"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24101-1		33ø28'49.50643"N	111ø59'43.81323"W	1084.845	902334.648	675962.426	1182.367	1.000099348	1.000051793	1.000151143	-0ø02'37"	04/30/2003	FD 3" PHOENIX BC IN HH 0.6' DN NO STAMPING
24101-2		33ø28'49.69796"N	111ø59'43.85052"W	1084.709	902354.008	675959.282	1182.231	1.000099348	1.000051783	1.000151133	-0ø02'37"	05/07/2004	FD 3" PHOENIX BC IN HH 1' DN NO STAMPING
24102-1		33ø28'23.10976"N	112ø04'58.22529"W	993.198	899698.146	649328.993	1091.186	1.000097070	1.000047412	1.000144491	-0ø05'30"	04/30/2003	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24102-2		33ø28'22.81151"N	112ø04'58.21773"W	993.076	899668.001	649329.585	1091.065	1.000097070	1.000047412	1.000144481	-0ø05'30"	06/14/2004	FD 3" PHOENIX BC IN HH 0.7' DN NO STAMPING
24102-3	T2N R3E 31 E	33ø28'23.11027"N	112ø04'57.51419"W	992.041	899698.101	649389.225	1090.028	1.000097077	1.000047362	1.000144441	-0ø05'30"	05/06/2004	FD 2 1/2" BC IN HH 0.3' DN NO STAMPING
24103-1		33ø28'22.88023"N	112ø03'54.36808"W	998.385	899666.757	654737.812	1096.262	1.000097664	1.000047662	1.000145331	-0ø04'55"	04/23/2003	FD 2" BC IN HH 0.8' DN NO STAMPING
24103-2	T2N R3E 32 E	33ø28'22.65307"N	112ø03'54.36928"W	998.443	899643.799	654737.678	1096.321	1.000097664	1.000047662	1.000145331	-0ø04'55"	04/23/2003	FD 2" BC IN HH 0.7' DN NO STAMPING
24104-1	T2N R3E 33 E	33ø28'22.74933"N	112ø02'51.56045"W	1012.647	899646.373	660057.748	1110.425	1.000098183	1.000048342	1.000146531	-0ø04'20"	04/28/2003	FD 3" BC IN HH 1' DN NO STAMPING
24105-1	T2N R3E 34 E	33ø28'22.92967"N	112ø01'48.82510"W	1032.043	899658.345	665371.599	1129.736	1.000098637	1.000049272	1.000147912	-0ø03'45"	04/29/2003	FD 3" PHOENIX BC IN HH 0.4' DN NO STAMPING
24106-1	T2N R3E 35 E	33ø28'23.20534"N	112ø00'46.50555"W	1050.775	899680.876	670650.233	1148.389	1.000099024	1.000050163	1.000149192	-0ø03'11"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24107-1		33ø28'23.03072"N	111ø59'43.96514"W	1075.086	899658.762	675947.528	1172.623	1.000099347	1.000051323	1.000150673	-0ø02'37"	04/23/2003	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24107-2		33ø28'22.95678"N	111ø59'43.94856"W	1074.801	899651.288	675948.927	1172.338	1.000099348	1.000051313	1.000150663	-0ø02'37"	05/03/2004	FD 3" PHOENIX BC IN HH 0.5' DN NO STAMPING
24512-1		33ø32'43.98987"N	111ø59'42.71078"W	1957.092	926033.921	676073.733	2054.115	1.000099354	1.000093429	1.000192797	-0ø02'36"	04/19/2004	FD CHISELED X ON ROCK NOTE- "1/4" CHISELED ON ROCK EAST OF X
24519-1	T2N R4E 7 NW CC AM	33ø32'17.79331"N	111ø59'42.63953"W	1431.637	923386.207	676077.758	1528.726	1.000099355	1.000068345	1.000167708	-0ø02'36"	04/19/2004	FD STONE 1.0' UP MARKED "CC" ON NORTH SIDE WITH 5 NOTCHES ON EAST SIDE AND 1 NOTCH ON WEST SIDE.
24519-Z1	T2N R4E 7 NW	33ø32'17.79316"N	111ø59'42.69434"W	1431.682	923386.194	676073.119	1528.771	1.000099354	1.000068345	1.000167708	-0ø02'36"	08/26/2004	SET 5/8" RB W/ 2" MARICOPA COUNTY AL CAP FL STAMPED "T2N S12 R3E T2N S6 S7 CC R4E 2004 RLS 21782"
24539-Z	T2N R4E 18 NW	33ø31'25.57183"N	111ø59'42.70099"W	N/A	918108.147	676068.560	N/A	1.000099354	1.000057153	1.000156514	-0ø02'36"	N/A	CALCULATED POSITION - NOTHING FD OR SET

SECTIONS 1 through 36 IN
TOWNSHIP 2 NORTH, RANGE 3 EAST
MCDOT PROJECT 40069012